



VQ 100

TANNOY®



Product Description

The VQ 100 is a full range, three-way loudspeaker system designed for applications which require high output capability with class leading pattern control. The VQ 100 features a wide and exceptionally well defined dispersion characteristic.

For a variety of uses, a single VQ 100 can produce more power and clarity over its 100 degree beamwidth area than many arrayed solutions using multiple cabinets, a great advantage when considering your building aesthetics.

With low frequency extension to 90Hz, the VQ 100 can be combined with various subwoofers for extended bandwidth.

The VQ 100 can be configured for use in Bi-Amp or Tri-Amp mode, in conjunction with a suitable digital signal processor (DSP).

Horn design involves balancing compromise.....until now.

Key performance parameters that can be controlled by the designer include: frequency response (both on and off-axis), horizontal and vertical beamwidth, directivity index, electrical impedance, harmonic distortion, and low frequency cut-off. Our unique approach in keeping what is effectively a Dual Concentric™ behind a single horn gives us many performance advantages. Performance of the VQ 100 in terms of accuracy & sound quality is second to none.

The VQ 100 incorporates a unique driver technology to radiate a coherent single point source for superior dispersion control when coupled to a PSW™ (Point Source Waveguide). This advanced design aligns the acoustical centres of the transducers providing a single coherent wavefront emanating from the throat. The PSW™ waveguide achieves an optimum balance of extremely well controlled coverage, smooth frequency response, and natural sound character.

The low frequency section, two (12") low frequency transducers, offers high power handling and low power compression for high continuous SPL capability. A newly designed LF loading design provides the highest possible sensitivity for low/mid frequency output. The VQ 100 is part of an expanding line up of VQ products, addressing the requirement for compact dimensions without compromising performance in any way.

Features

- "PSW™ Waveguide" - Point source design (Patent applied for).
- Excellent Phase Coherence
- Perfect time alignment without the associated problems of multi source interference
- Compact Dimensions
- Class leading directivity characteristics
- Extremely high sensitivity, therefore high SPL's can be achieved with a very modest amount of amplifier power
- Exceptional transient response

Applications

- Large Houses of Worship
- Large Corporate AV applications
- Stadiums & other Sports facilities
- Dance Clubs
- Live sound – concert halls, theatres, open-air venues

Tannoy United Kingdom
 Tannoy Deutschland
 Tannoy France
 TC|Group Americas

T: 00 44 (0) 1236 420199
 T: 00 49 (180) 1111 881
 T: 00 33 (0)1 7036 7473
 T: 00 1 (519) 745 1158

E: enquiries@tannoy.com
 E: enquiries@tannoy.com
 E: ventes@tannoy.com
 E: info@tcgroup-americas.com

tannoy®.com



VQ 100

TANNOY®

TECHNICAL SPECIFICATIONS

System

System Type	3-Way Full Range - Point Source
Frequency Response (-3dB) ⁽¹⁾	115Hz - 23kHz
Frequency Range (-10dB) ⁽¹⁾	90Hz - 27kHz
Operating Modes	Bi-Amp (LF,MF/HF) User Configurable Tri-Amp (LF, MF,HF) User Configurable

System Sensitivity (1W @1m) ⁽²⁾

Bi-Amp		
LF (80Hz - 450Hz)	105dB (2.0V @ 4 Ohms)	
Passive MF/HF (450Hz - 23kHz)	110dB (2.83V @ 8ohms)	
Tri-Amp		
LF (80Hz - 450Hz)	105dB (2.0V @ 4 Ohms)	
MF (450Hz - 7kHz)	111dB (2.83V @ 8 Ohms)	
HF (7kHz - 23kHz)	110dB (2.83V @ 8 Ohms)	
Dispersion (-6dB)	100 degrees conical	
Driver Complement		
LF	2 x 300mm (12.00") Low Frequency Transducers, Semi Horn Loaded	
MF/HF	Dual Concentric™ Compression driver loaded into a single PSW™ Waveguide	

Crossover	Bi-amp 450Hz (active) 7kHz (passive) Tri-amp 450Hz, 7kHz (active)
------------------	---

Directivity Factor (Q)	8.5 averaged 1kHz to 10kHz
-------------------------------	----------------------------

Directivity Index (DI)	9.3 averaged 1kHz to 10kHz
-------------------------------	----------------------------

Rated Maximum SPL ⁽²⁾		
	Average	Peak
Low Frequency	135dB	141dB
Mid Frequency	134dB	140dB
High Frequency	133dB	139dB
Passive MF/HF	134dB	140dB

Power Handling ⁽³⁾		
	Average	Peak
LF @ 4 Ohms	1000W (63.3V)	2000W
MF @ 8 Ohms	200W (40V)	400W
HF @ 8 Ohms	90W (27V)	180W
Passive MF/HF @ 8 Ohms	200W (40V)	400W

Recommended Amplifier Power

Low Frequency	2000W into 4 Ohms
Mid Frequency	400W into 8 Ohms
High Frequency	200W into 8 Ohms
Passive MF/HF	400W into 8 Ohms

Nominal Impedance

Low Frequency	4ohms (4.1 Ohms Minimum)
Mid Frequency	8ohms (6.0 Ohms Minimum)
High Frequency	8ohms (8.6 Ohms Minimum)

Construction

Enclosure	18mm (0.71") birch plywood. Vented and internally braced.
Grille	Powder coated perforated steel grille
Finish	Black or white textured paint (custom colours on request)
Connectors	Barrier Strip
Fittings	8 x Recessed carrying handles 12 x M10 flying inserts
Dimensions	925mm x 694mm x 515mm (36.42" x 27.32" x 20.28")
NET Weight	65kg (143.3 lbs)

Notes:

- (1) Average over stated bandwidth. Measured at 3 metres on axis, then referred to 1 metre
- (2) Unweighted pink noise input, measured at 3 metres in an anechoic chamber, then referred to 1 metre
- (3) Accelerated Life Test (EIA RS426-B)

A full range of measurements, performance data, CLF and Ease™ Data can be downloaded from www.tannoy.com

Full independent verification of published specifications carried out by NWA Labs, California can also be obtained from the downloads section of www.tannoy.com

Tannoy operates a policy of continuous research and development. The introduction of new materials or manufacturing methods will always equal or exceed the published specifications, which Tannoy reserves the right to alter without prior notice. Please verify the latest specifications when dealing with critical applications.

Ordering Information

PART NUMBER	MODEL NAME	COLOUR	PACKED QUANTITY
8001 4820	VQ 100	BLACK	1

Tannoy United Kingdom
Tannoy Deutschland
Tannoy France
TC|Group Americas

T: 00 44 (0) 1236 420199
T: 00 49 (180) 1111 881
T: 00 33 (0)1 7036 7473
T: 00 1 (519) 745 1158


E: enquiries@tannoy.com
E: enquiries@tannoy.com
E: ventes@tannoy.com
E: info@tcgroup-americas.com

tannoy.com




PERFORMANCE MEASUREMENTS

Frequency Response : Processed Bi-amplified

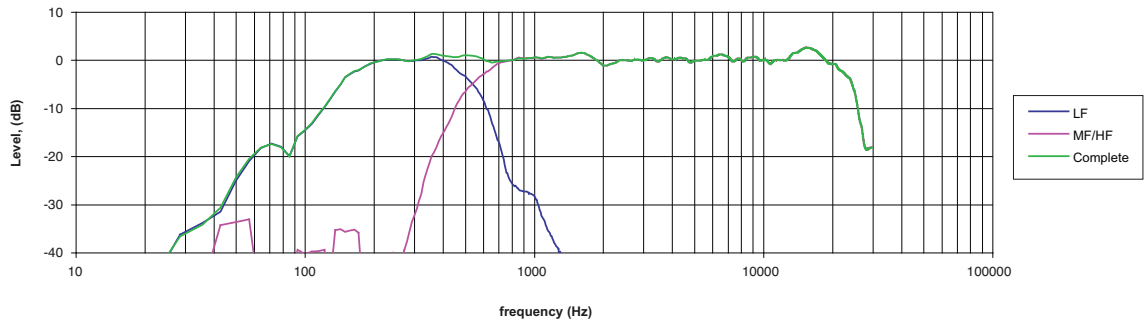


ANECHOIC
FREQUENCY
RESPONSE
(BI-AMP MODE)

Frequency Response : Digital Signal Processor

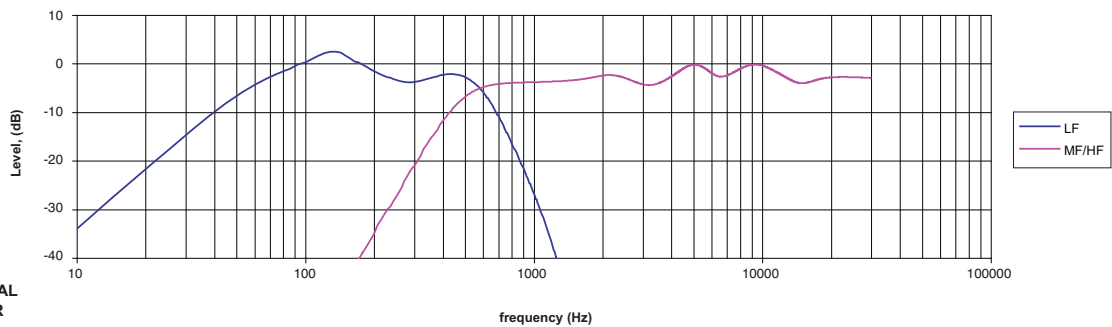

ELECTRICAL
TRANSFER
FUNCTION
FOR OPTIMAL
OPERATION
(BI-AMP MODE)

Frequency Response: Processed Tri-amplified

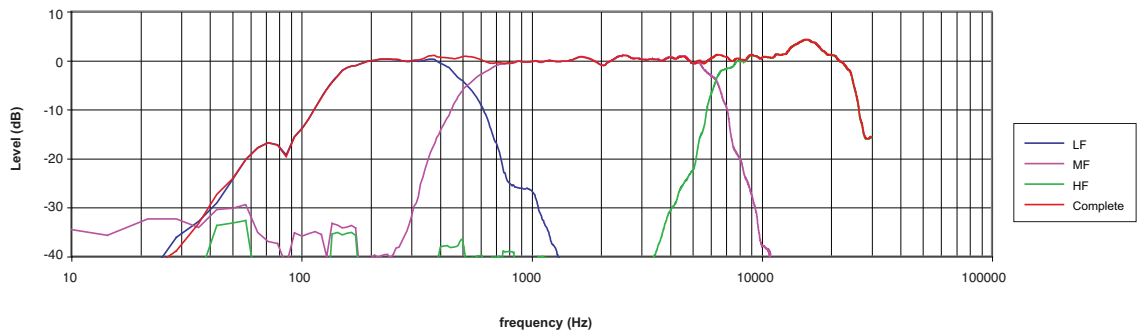

ANECHOIC
FREQUENCY
RESPONSE
(TRI-AMP MODE)

Tannoy United Kingdom
Tannoy Deutschland
Tannoy France
TC|Group Americas

T: 00 44 (0) 1236 420199
T: 00 49 (180) 1111 881
T: 00 33 (0)1 7036 7473
T: 00 1 (519) 745 1158


E: enquiries@tannoy.com
E: enquiries@tannoy.com
E: ventes@tannoy.com
E: info@tcgroup-americas.com

tannoy.com




PERFORMANCE MEASUREMENTS

Frequency Response: Digital Signal Processor

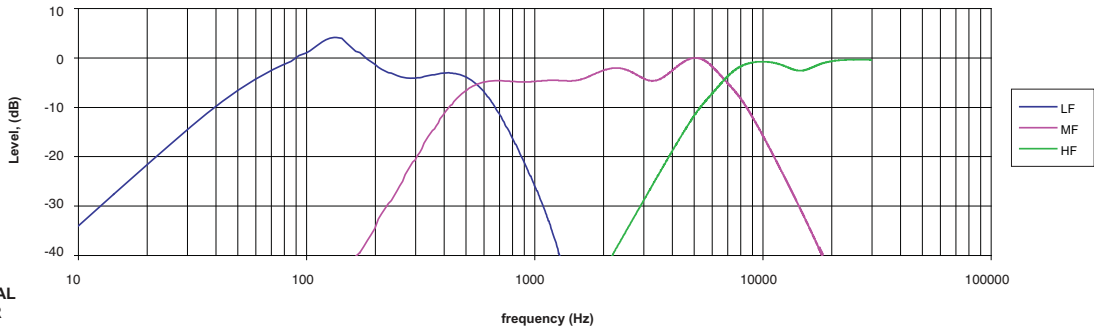


ELECTRICAL TRANSFER FUNCTION FOR OPTIMAL OPERATION (TRI-AMP MODE)

VQ 100 Active 2 way_3.6v, 4.01m, 1kHz, 8 Ohms_Setup w processing 9 (1/19) Smoothed 1/3 (Full IR)

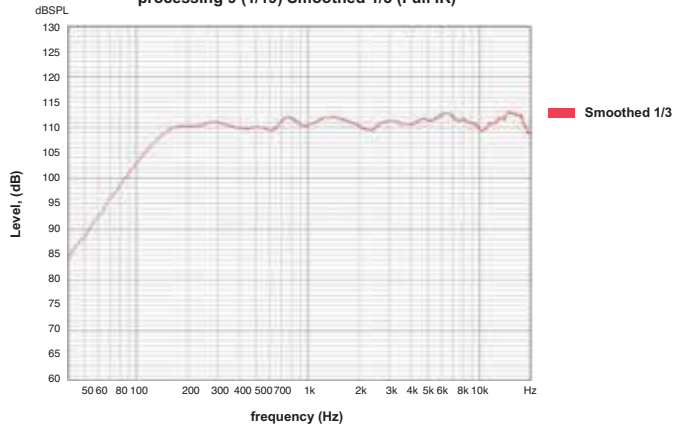

SENSITIVITY (LF RAISED +5DB)

Impedance vs frequency

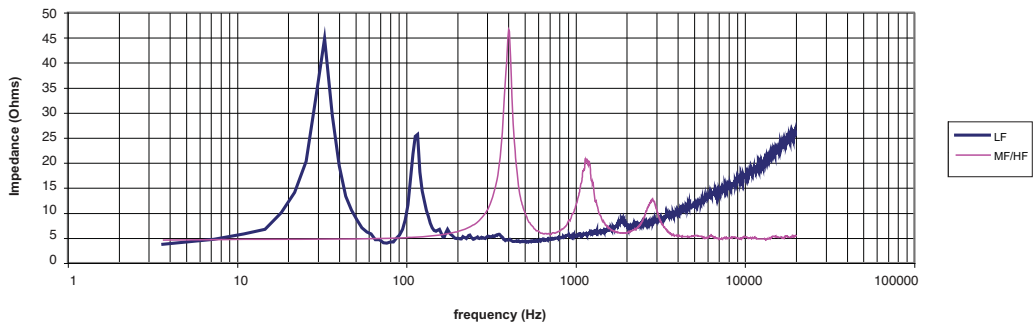

IMPEDANCE (BI-AMP MODE)

Tannoy United Kingdom
 Tannoy Deutschland
 Tannoy France
 TC|Group Americas

T: 00 44 (0) 1236 420199
 T: 00 49 (180) 1111 881
 T: 00 33 (0)1 7036 7473
 T: 00 1 (519) 745 1158


E: enquiries@tannoy.com
 E: enquiries@tannoy.com
 E: ventes@tannoy.com
 E: info@tcgroup-americas.com

tannoy®.com




PERFORMANCE MEASUREMENTS

Impedance vs frequency

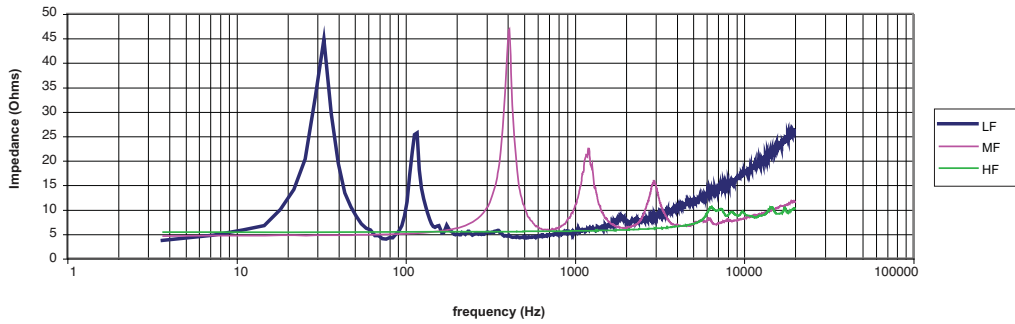


IMPEDANCE
(TRI-AMP MODE)

Frequency Response: Processed Bi-amplified
Horizontal Off-axis

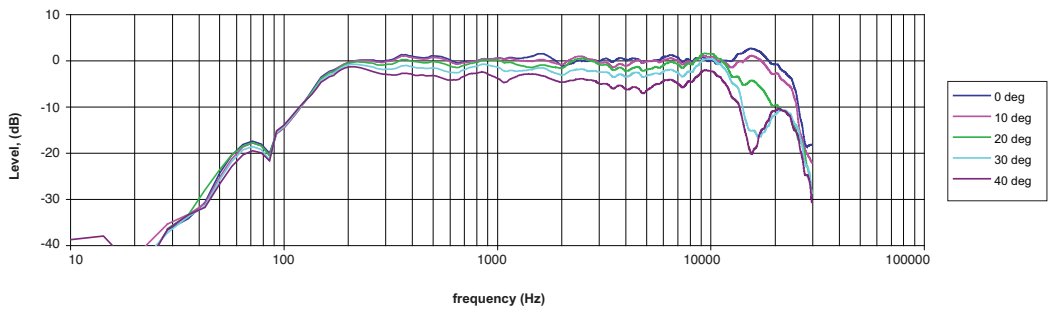

HORIZONTAL
OFF AXIS
RESPONSE
(BI-AMP MODE)

Frequency Response: Processed Bi-amplified
Upper Vertical Off-axis

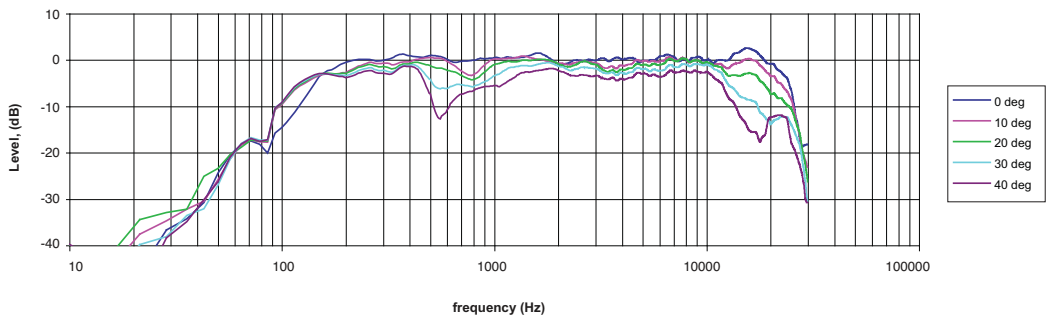

VERTICAL
UPPER
OFF AXIS
RESPONSE
(BI-AMP MODE)

Tannoy United Kingdom
Tannoy Deutschland
Tannoy France
TC|Group Americas

T: 00 44 (0) 1236 420199
T: 00 49 (180) 1111 881
T: 00 33 (0)1 7036 7473
T: 00 1 (519) 745 1158


E: enquiries@tannoy.com
E: enquiries@tannoy.com
E: ventes@tannoy.com
E: info@tcgroup-americas.com

tannoy.com




PERFORMANCE MEASUREMENTS

Frequency Response: Processed Bi-amplified
Lower Vertical Off-axis

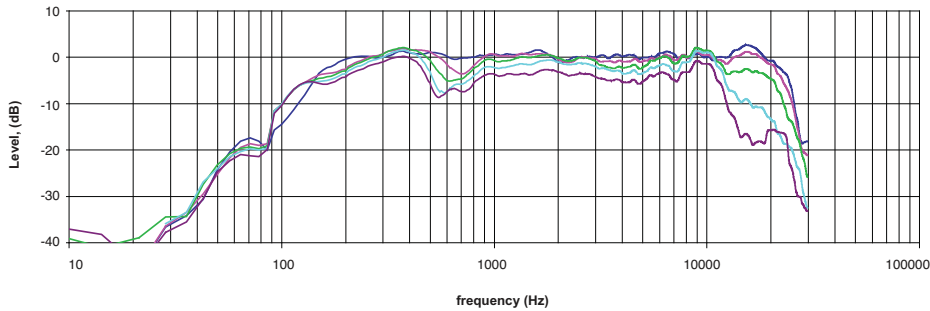


**VERTICAL
LOWER
OFF AXIS
RESPONSE
(BI-AMP MODE)**

Frequency Response: Processed Tri-amplified
Horizontal Off-axis

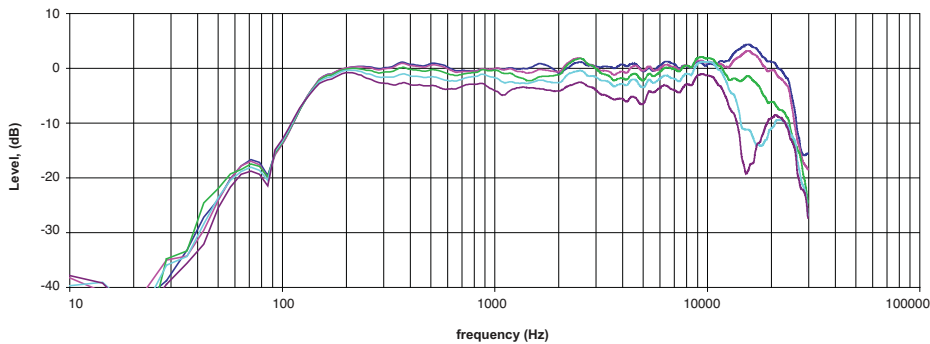

**HORIZONTAL
OFF AXIS
RESPONSE
(TRI-AMP MODE)**

Frequency Response: Processed Tri-amplified
Upper Vertical Off-axis

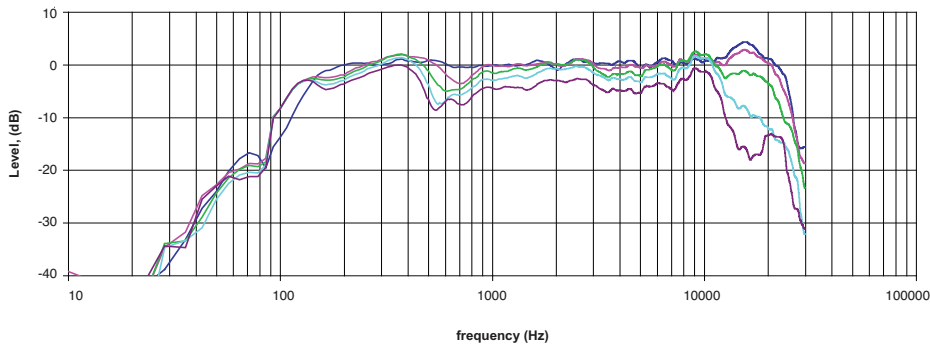

**VERTICAL
UPPER
OFF AXIS
RESPONSE
(TRI-AMP MODE)**

Tannoy United Kingdom
Tannoy Deutschland
Tannoy France
TC|Group Americas

T: 00 44 (0) 1236 420199
T: 00 49 (180) 1111 881
T: 00 33 (0)1 7036 7473
T: 00 1 (519) 745 1158


E: enquiries@tannoy.com
E: enquiries@tannoy.com
E: ventes@tannoy.com
E: info@tcgroup-americas.com

tannoy.com




PERFORMANCE MEASUREMENTS

Frequency Response: Processed Tri-amplified
Lower Vertical Off-axis

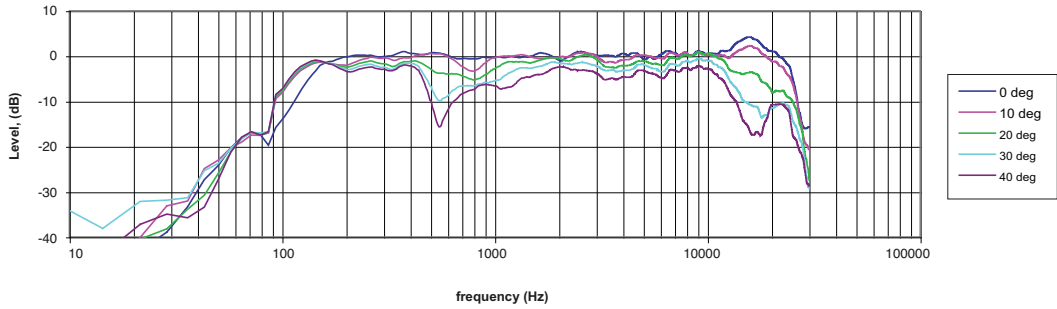


**VERTICAL
LOWER
OFF AXIS
RESPONSE
(TRI-AMP MODE)**

Beamwidth vs Frequency

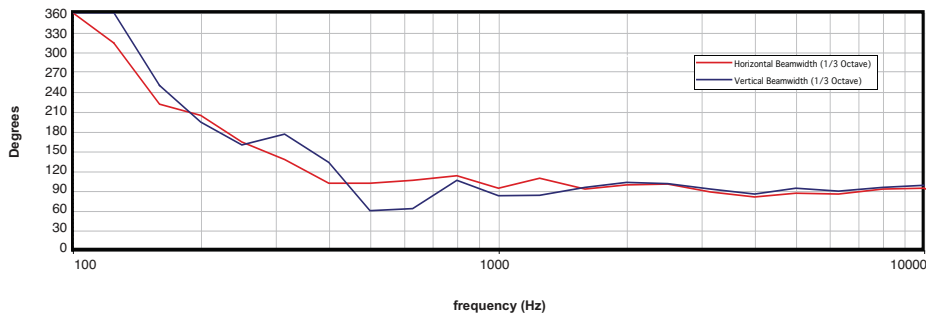

**BEAMWIDTH
(BI-AMP MODE)**

Beamwidth vs Frequency

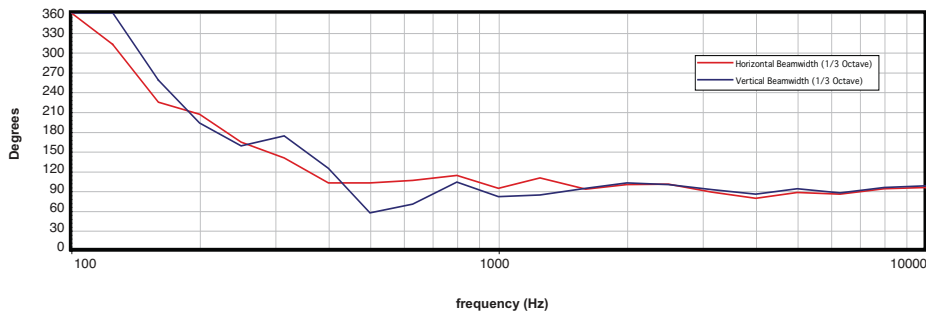

**BEAMWIDTH
(TRI-AMP MODE)**

Tannoy United Kingdom
Tannoy Deutschland
Tannoy France
TC | Group Americas

T: 00 44 (0) 1236 420199
T: 00 49 (180) 1111 881
T: 00 33 (0) 1 7036 7473
T: 00 1 (519) 745 1158

E: enquiries@tannoy.com
E: enquiries@tannoy.com
E: ventes@tannoy.com
E: info@tcgroup-americas.com

tannoy.com




VQ 100

TANNOY®


PERFORMANCE MEASUREMENTS

Q vs Frequency

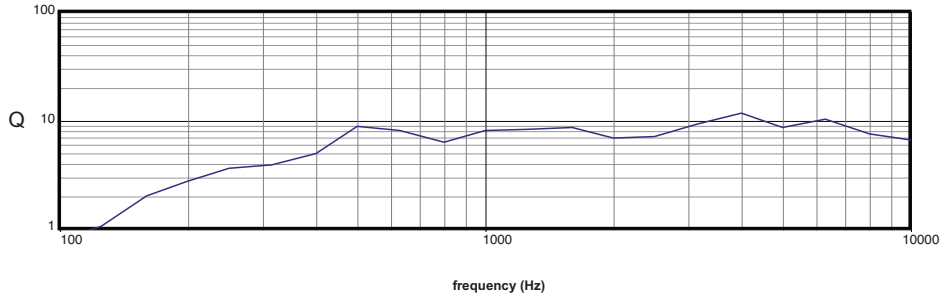


Q VS FREQUENCY
(BI-AMP MODE)

DI vs Frequency

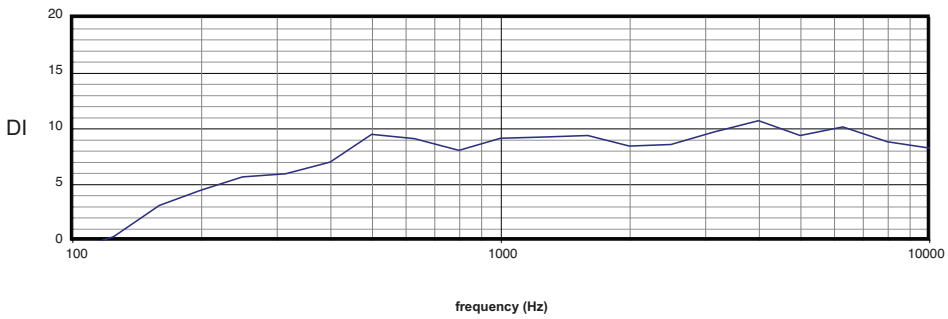

DIRECTIVITY INDEX
(BI-AMP MODE)

Q vs Frequency

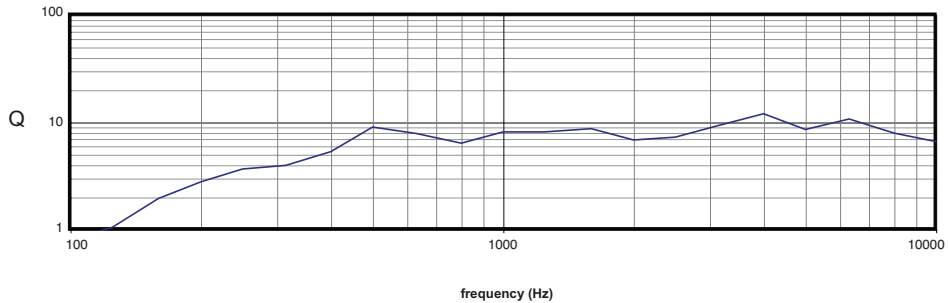

Q VS FREQUENCY
(TRI-AMP MODE)

Tannoy United Kingdom
 Tannoy Deutschland
 Tannoy France
 TC | Group Americas

T: 00 44 (0) 1236 420199
 T: 00 49 (180) 1111 881
 T: 00 33 (0)1 7036 7473
 T: 00 1 (519) 745 1158

E: enquiries@tannoy.com
 E: enquiries@tannoy.com
 E: ventes@tannoy.com
 E: info@tcgroup-americas.com

tannoy®.com




VQ 100

TANNOY®

PERFORMANCE MEASUREMENTS

DI vs Frequency

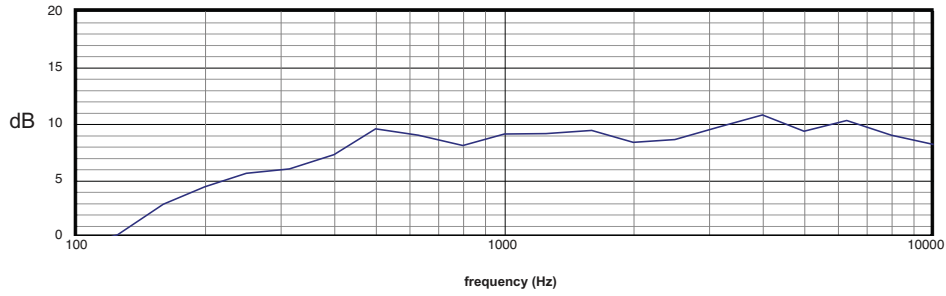

DIRECTIVITY INDEX
(TRI-AMP MODE)

Tannoy United Kingdom
Tannoy Deutschland
Tannoy France
TC|Group Americas

T: 00 44 (0) 1236 420199
T: 00 49 (180) 1111 881
T: 00 33 (0)1 7036 7473
T: 00 1 (519) 745 1158

E: enquiries@tannoy.com
E: enquiries@tannoy.com
E: ventes@tannoy.com
E: info@tcgroup-americas.com







tannoy®.com



VQ 100

TANNOY®

PERFORMANCE MEASUREMENTS POLAR PLOTS (1/3 OCTAVE) Bi-Amp Mode

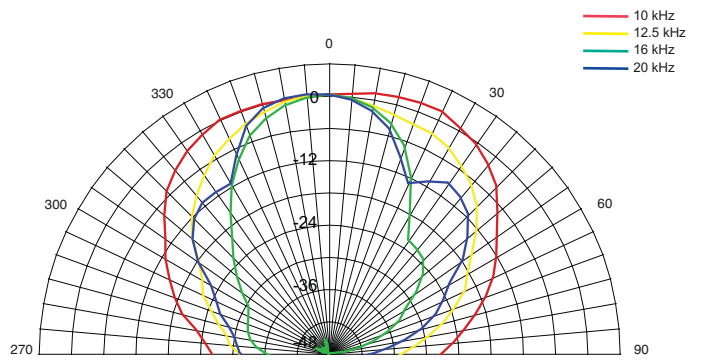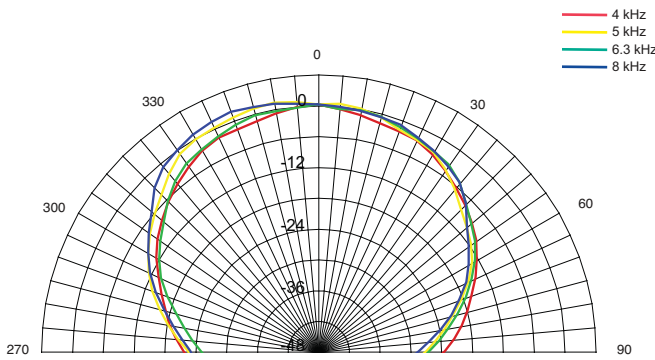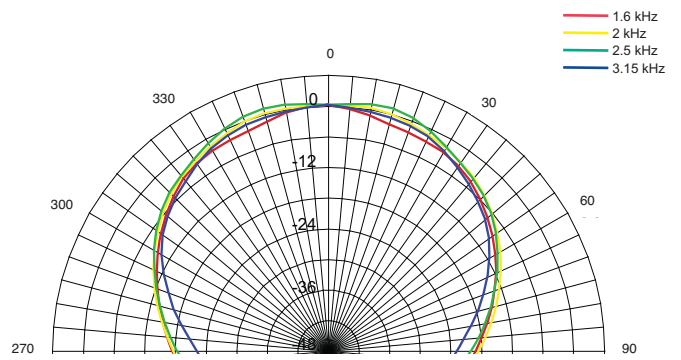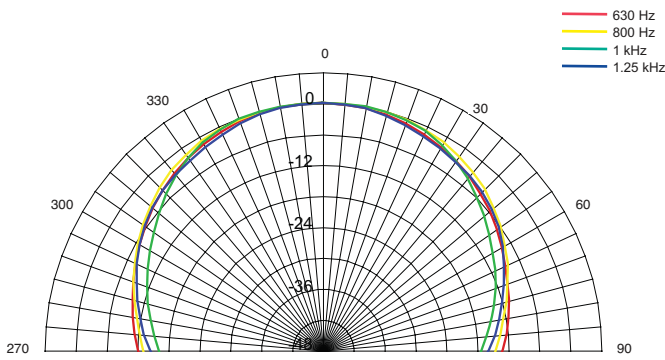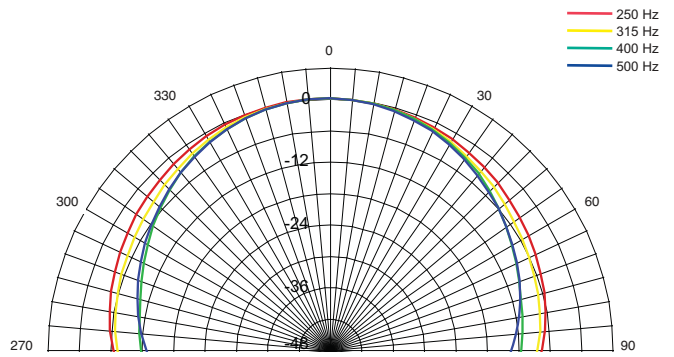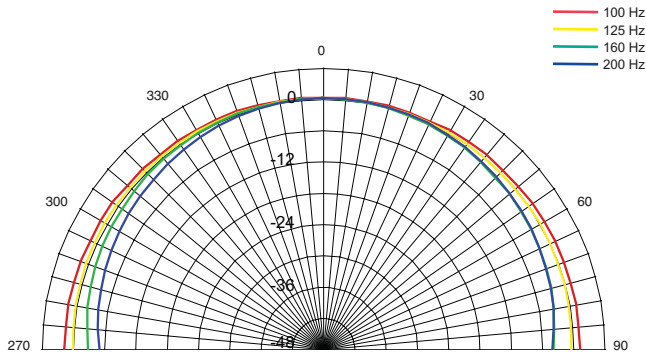

Tannoy United Kingdom
 Tannoy Deutschland
 Tannoy France
 TC|Group Americas

T: 00 44 (0) 1236 420199
 T: 00 49 (180) 1111 881
 T: 00 33 (0)1 7036 7473
 T: 00 1 (519) 745 1158

E: enquiries@tannoy.com
 E: enquiries@tannoy.com
 E: ventes@tannoy.com
 E: info@tcgroup-americas.com







tannoy.com



VQ 100

TANNOY®

PERFORMANCE MEASUREMENTS POLAR PLOTS (1/3 OCTAVE) Bi-Amp Mode

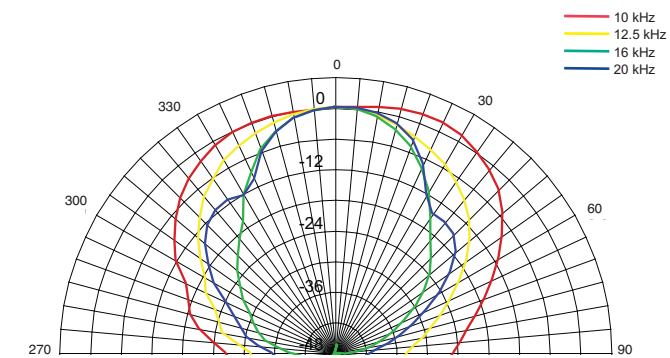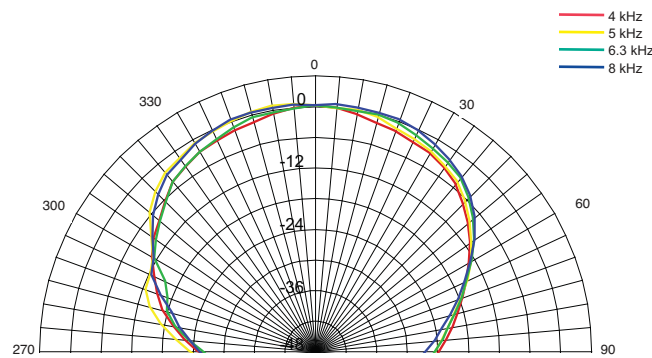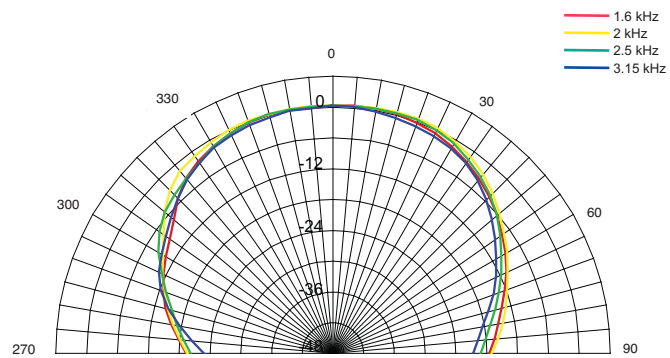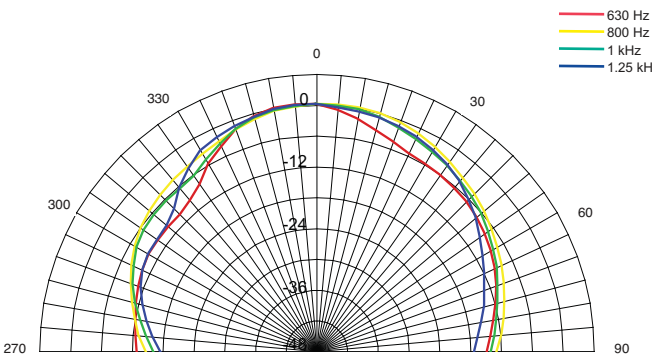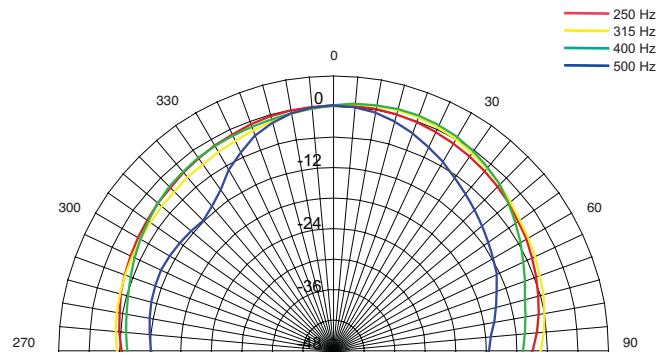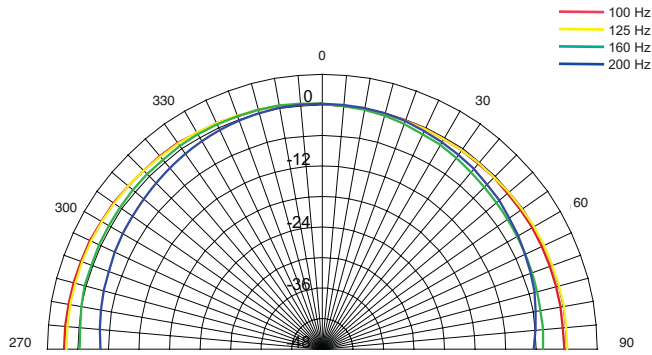

Tannoy United Kingdom
 Tannoy Deutschland
 Tannoy France
 TC | Group Americas

T: 00 44 (0) 1236 420199
 T: 00 49 (180) 1111 881
 T: 00 33 (0)1 7036 7473
 T: 00 1 (519) 745 1158

E: enquiries@tannoy.com
 E: enquiries@tannoy.com
 E: ventes@tannoy.com
 E: info@tcgroup-americas.com







tannoy.com




VQ 100

TANNOY®

DIMENSIONAL SKETCHES

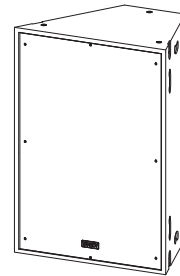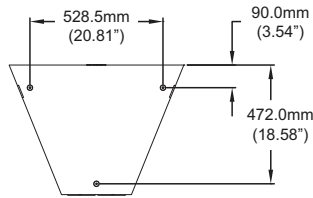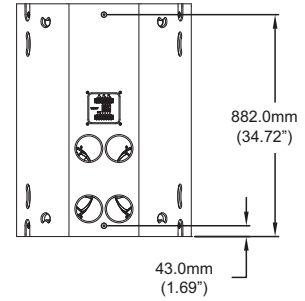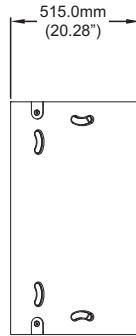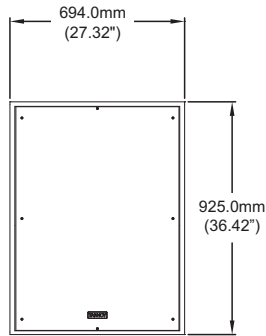

INPUT PANEL

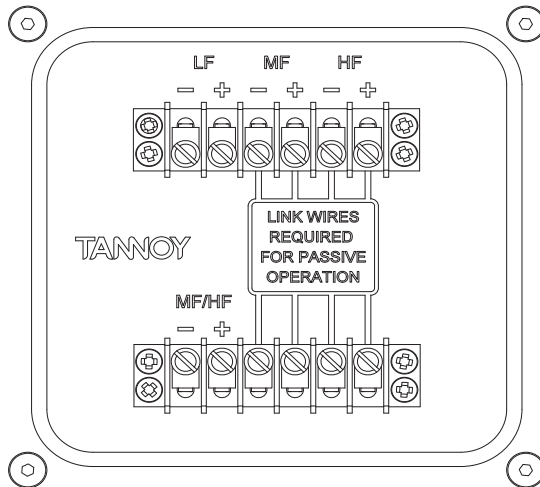

Tannoy United Kingdom
Tannoy Deutschland
Tannoy France
TC | Group Americas

T: 00 44 (0) 1236 420199
T: 00 49 (180) 1111 881
T: 00 33 (0)1 7036 7473
T: 00 1 (519) 745 1158

E: enquiries@tannoy.com
E: enquiries@tannoy.com
E: ventes@tannoy.com
E: info@tcgroup-americas.com


tannoy.com




VQ 100

TANNOY®


OPTIONAL ACCESSORIES

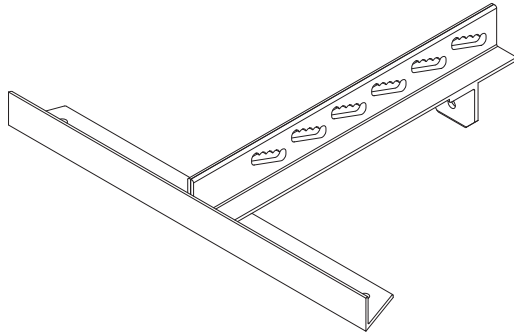


VQ FLYING BRACKET
(SINGLE POINT HANGING BRACKET)

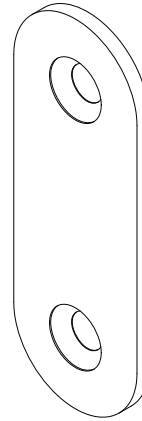

VQ LINK (LINK PLATE)

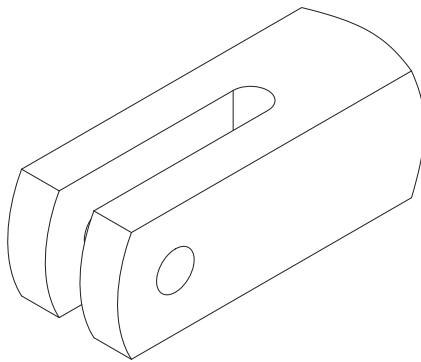

VQ ROD END

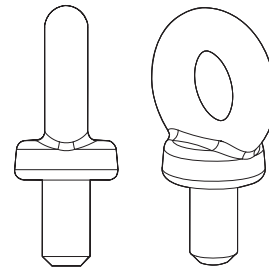

VEB FORGED EYEBOLT

Ordering Information

PART NUMBER	MODEL NAME	COLOUR	PACKED QUANTITY
5470 0220	VQ Flying Bracket (Single Point Hanging Bracket)	BLACK	1
5470 0221	VQ Link (Link Plate)	BLACK	1
5470 0223	VQ Rod End	BLACK	1
8001 2820	VEB Forged Eyebolt	-	1

Tannoy United Kingdom
 Tannoy Deutschland
 Tannoy France
 TC | Group Americas

T: 00 44 (0) 1236 420199
 T: 00 49 (180) 1111 881
 T: 00 33 (0)1 7036 7473
 T: 00 1 (519) 745 1158

E: enquiries@tannoy.com
 E: enquiries@tannoy.com
 E: ventes@tannoy.com
 E: info@tcgroup-americas.com

tannoy®.com



Architectural specifications

The loudspeaker shall consist of a Dual Concentric™ Compression driver with a 3.5" Midrange voice coil and a 2" High Frequency voice coil, both mounted in a common subsystem with a common 2" exit. This Dual Concentric™ compression driver shall be coupled to a PSW™ (Point Source Waveguide) constant directivity horn operating over the frequency range of 450Hz to 23kHz. The low frequency section consists of two 300mm (12") woofers, and shall be mounted in a semi-horn loaded enclosure to provide significant off axis attenuation below 450Hz. The loudspeaker shall be user configurable for either Bi-Amp or Tri-Amp operation via the rear input panel. The loudspeaker shall be trapezoidal in shape.

Performance of the loudspeaker, using the recommended electronic control shall meet or exceed the following criteria:

The Low Frequency section shall produce a sound pressure level of 105dB SPL on axis at 1 meter with a power input of 1 Watt, and shall be capable of producing a peak output of 141dB SPL on axis at 1 meter. In Bi-amp mode the Mid/High section shall produce a sound pressure level of 110dB SPL on axis at 1 meter with a power input of 1 Watt, and shall be capable of producing a peak output of 140dB SPL on axis at 1 meter. In Tri-amp mode the Mid frequency section shall produce a sound pressure level of 111dB SPL on axis at 1 meter with a power input of 1 Watt, and shall be capable of producing a peak output of 140dB SPL on axis at 1 meter. The High Frequency section shall produce a sound pressure level of 110dB SPL on axis at 1 meter with a power input of 1 Watt, and shall be capable of producing a peak output of 139dB SPL on axis at 1 meter. The Low Frequency section shall handle 1000 Watts of amplifier power and shall have a nominal impedance of 4 Ohms. In Bi-amp mode the Mid/High section shall handle 400 Watts of amplifier power and shall have a nominal impedance of 8 Ohms. In Tri-amp mode the Mid frequency section shall handle 400 Watts of amplifier power and shall have a nominal impedance of 8 Ohms. The High Frequency section shall handle 180 Watts of amplifier power and shall have a nominal impedance of 8 Ohms. The dispersion of the loudspeaker shall be 100 degrees conical (-6dB). The enclosure shall be of birch plywood construction and internally braced. The enclosure shall be fitted with eight integral carrying handles, and twelve M10 inserts for flying hardware. The enclosure shall not exceed the following dimensions (H x W x D): 925mm x 694mm x 515mm (36.42" x 27.32" x 20.28").

The loudspeaker shall be the Tannoy...VQ 100.

